


Wilkerson Standard Regulators




Features:

- 0-125 PSI adjusting range
- self-relieving standard
- four adjusting pressure ranges available
- To increase regulated pressure, pull adjusting knob up and turn clockwise. To reduce pressure, turn knob counter clockwise.
- Two ¼" NPT gauge ports located on the front and rear faces of the body; ports may be used as additional regulated ports or for pressure gauges.
- models supplied without gauge use a GC230 gauge
- maximum operating conditions:
300 PSIG (20.7 bar) and 32°F to 150°F (0°C to 65.5°C)

F

Size	Flow (SCFM)	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
⅜"	162	R28-03RG	\$136.05	R28-03R	\$115.35
½"	170	R28-04RG	136.05	R28-04R	115.35
¾"	176	R28-06RG	136.05	R28-06R	115.35


Wilkerson High Flow Regulators

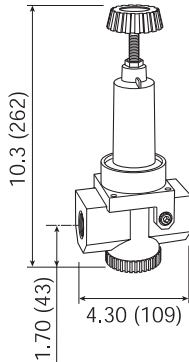

Features:

- 0-125 PSI adjusting range
- self-relieving standard
- piston operated
- can be installed with the adjusting knob in any position
- To increase regulated pressure, pull adjusting knob up and turn clockwise. To reduce pressure, turn knob counter clockwise.
- two ¼" NPT gauge ports standard on models without gauge, one ¼" NPT gauge port standard on models with gauge - can be used for additional outlet ports
- models supplied without gauge use a GC230 gauge
- maximum operating conditions:
300 PSIG (20.7 bar) and 32°F to 150°F (0°C to 65.5°C)

Size	Flow (SCFM)	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
¾"	480	R30-06RG	\$282.15	R30-06R	\$261.45
1"	500	R30-08RG	282.15	R30-08R	261.45
1¼"	800	R30-0ARG	282.15	R30-0AR	261.45

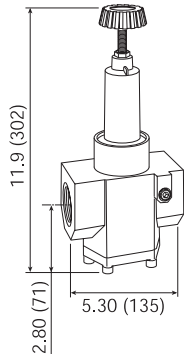

Features:

- 0-125 PSI adjusting range
- self-relieving standard
- piston operated
- can be installed with the adjusting knob in any position
- To increase regulated pressure, pull adjusting knob up and turn clockwise. To reduce pressure, turn knob counter clockwise.
- two ¼" NPT gauge ports standard on models without gauge, one ¼" NPT gauge port standard on models with gauge - can be used for additional outlet ports
- models supplied without gauge use a GC230 gauge
- maximum operating conditions:
300 PSIG (20.7 bar) and 32°F to 150°F (0°C to 65.5°C)

Size	Flow (SCFM)	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1½"	1200	R40-0BRG	\$517.35	R40-0BR	\$496.65
2"	1200	R40-0CRG	517.35	R40-0CR	496.65

See pages 236-238 for regulator accessories.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.